




Curtain

- 26-gauge galvanized, Grade E hard steel
- 5/8" ribbed corrugation
- Maximum opening size of 12' x 18'
- Flexible wear strips




Bottom Bar

- 6063 - T6 aluminum extrusion
- 2" x 1 1/2" 11-gauge galvanized steel angle
- Bulb astragal
- Stainless steel nuts and bolts



Axle-Drum Assembly

- 1 5/16" O.D. steel axle, 14-gauge
- 11-gauge axle on doors over 10' wide
- Utilizes 12", 16-gauge drums
- Shielded steel ball bearings in drums
- Full top sheet



A.C.E. Guide System

- 16-gauge galvanized steel
- Adjustable bolt on head stop
- Polyethylene wear strip
- Pre-punched for lock and attachment fasteners

Hardware

- Saddle clamps with set fasteners
- 10-gauge slide locks; 2 per door
- 16-gauge step plates; 2 per door
- 1/4" steel angle T-bracket





Technical Notes

- Doors up to 10' have 20" of headroom
- Doors 10' to 14' have 22" of headroom
- Doors over 14' have 24" of headroom
- Doors require up to 24" of vertical clearance and 10 1/2" of side r
- Smaller doors may require less
- For specific measurements, contact DBCI at 800.542.0501



Options

- Insulated 2250 Series
- 1900 Series - low overhead option
- Chain hoist 4:1 reduction
- Vision panels (17" x 5")
- Top draft stop
- Side draft stop
- Hood
- Steel mounting plates
- Electric operator




NOTE: The 2000 is not rated for wind loads. Please see 2500, 3000 or 5000.




Also available with insulation (2250 Series)


INTERIOR ELEVATION

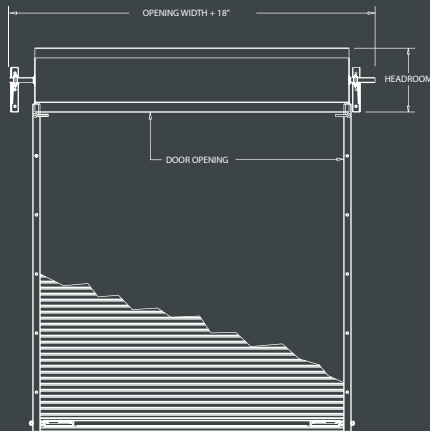


GUIDE DETAIL



DOOR ENGAGEMENT



GUIDE MOUNTING

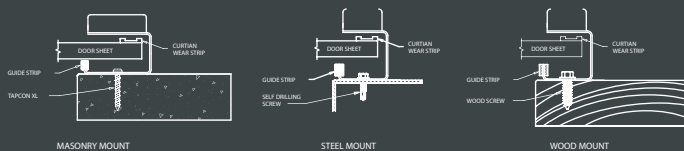

INSULATED DOOR DETAIL

